



# AN-1000X+

Speaker Monitor



## Perfect for...

- Install & Integration Projects
- Conference Rooms
- Ships & Freighters
- Theme Parks
- Classrooms
- City Council Meetings
- Lecture Halls
- Board Rooms
- Public Gatherings
- Presentations & Meetings
- Studio Monitor
- Theater Production
- Broadcast Studios
- Courtrooms
- Libraries
- and more!




## TECH SPECS

- 107 dB of clear sound
- 50W AC
- 1.9 GHz wireless mic frequency
- 150'+ wireless microphone range
- 1/4" line input
- Balanced XLR input
- 1/4" line output to daisy chain multiple units
- Mic/line level dip switch
- One 4.5" woofer
- One 10 mm dome tweeter

## FEATURES

- Reach crowds of 250+
- Connect up to two wireless mics
- Stand & bracket mountable
- Built-in bracket mount screws for easy installation (bracket with Allen wrench sold separately)

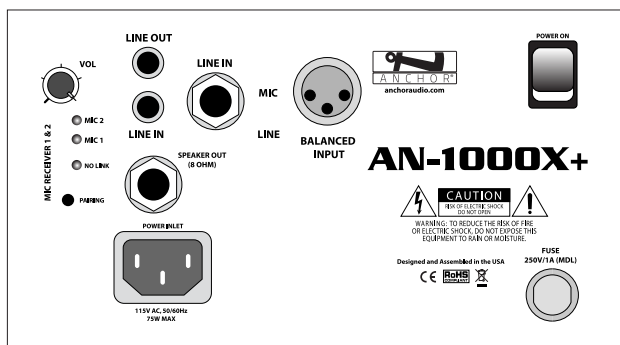

(AN-1000XU2+ Back Panel)


### Technical Specifications

Rated Power Output	50 watts AC
Max SPL @ Rated Power	107 dB @ 1 meter
Frequency Response	65 Hz – 20 kHz ± 3 dB
Microphone Wireless Frequency	1.9 GHz DECT
Microphone Wireless Range	150' + line of sight
Line Inputs	Hi-Z, unbalanced, 1/4" phone & RCA
Balanced Inputs	Microphone / line configurable, female XLR, switchable phantom power
Line Output	Lo-Z, RCA, buffer isolated line-level
Speaker Output	8 Ω, unswitched, 1/4" phone
Speaker Type	4.5" woofer, 10 mm dome tweeter
AC Power Requirements	110 - 125 VAC, 50/60 Hz 50W max
Export Model Power Requirements	208 - 240 VAC, 50/60 Hz 50W max
Fuse Rating	T 1.0A / 250V (internally mounted)
Export Model Fuse Rating	T 0.5A / 250V (internally mounted)
Dimensions (HWD)	9" x 8" x 5.5" (23 x 21 x 14 cm)
Weight	6.5 lbs / 2.9 Kg

### AN-1000X+ Models

AN-1000X+	AN-1000X+ powered speaker monitor
AN-1000XU2+	AN-1000X+ with built-in dual wireless mic receiver
Microphones	
WH-LINK	Wireless handheld mic (1.9 GHz)
WB-LINK	Wireless belt pack transmitter (1.9 GHz)
HBM-LINK	Headband mic (3.5 mm plug)
CM-LINK	Collar mic (3.5 mm plug)
EM-LINK	UltraLite mic (3.5 mm plug)
LM-LINK	Lapel mic (3.5 mm plug)
MIC-90	Handheld mic with 20 ft. cable (XLR plug)
Accessories	
SC-50	Companion speaker cable (1/4" phone plug) - 50 ft.
SB-3BK+	40° tilt bracket ceiling mount - black
SB-360BK+	360° swivel wall mount - black
RM-1BK+	Single rack mount - black
RM-12BK+	Double rack mount - black
SS-250	Speaker stand for AN-100CM+, AN-130+, AN-135+ and AN-1000X+
CC-100	Carrying bag for AN-100CM+, AN-130+, AN-135+ and AN-1000X+
CC-100XL	Extra large carrying bag for AN-100CM+, AN-130+, AN-135+ and AN-1000X+

### AN-1000X+ DAISY-CHAIN DAISY-CHAIN READY • CONNECT MULTIPLE SYSTEMS

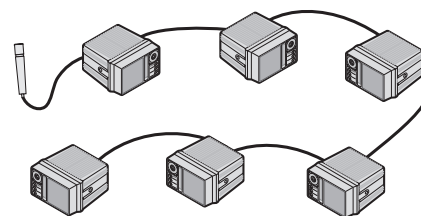

SIMPLE LINE-OUT TO LINE-IN CONNECTION EXPANDS COVERAGE



(Features & Specifications Subject to Change Without Notice)

Designed and Assembled in the USA